

Poly Chain® GT2

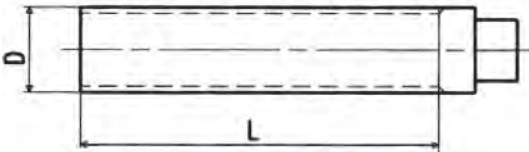
8mm Timing bar & flange

8 mm pitch PolyChain
appropriate flange to sit diameter of bar

teeth	p.c.d.	o.d. D	length L	catalogue reference	flange bore d	flange flare diameter f	flange OD D	flange thickness t	catalogue reference
22	56.02	54.42	200	22-8MGT-TB-S	47	57	60	1.5	B13 SP1.5
23	58.57	56.97	200	23-8MGT-TB-S	48	57	63	1.5	B14 SP1.5
24	61.12	59.52	200	24-8MGT-TB-S	52	61.5	66	1.5	B15 SP1.5
25	63.66	62.06	200	25-8MGT-TB-S	50.8	63.7	70	1.5	B103 SP1.5
26	66.21	64.61	200	26-8MGT-TB-S	56	65	71	1.5	B16 SP1.5
27	68.75	67.15	200	27-8MGT-TB-S	60	68.5	75	1.5	B17 SP1.5
28	71.30	69.70	200	28-8MGT-TB-S	60	68.5	75	1.5	B17 SP1.5
29	73.85	72.25	200	29-8MGT-TB-S	64	73.5	79	1.5	B18 SP1.5
30	76.39	74.79	200	30-8MGT-TB-S	63.5	75.8	83	1.5	B104 SP1.5
31	78.94	77.34	200	31-8MGT-TB-S	66.65	79.8	86	1.5	B105 SP1.5
32	81.49	79.89	200	32-8MGT-TB-S	72	82.5	87	1.5	B20 SP1.5
33	84.03	82.43	200	33-8MGT-TB-S	72	82.5	87	1.5	B20 SP1.5
34	86.58	84.98	200	34-8MGT-TB-S	76	85.5	91	1.5	B21 SP1.5
35	89.13	87.53	200	35-8MGT-TB-S	80	89	93	1.5	B22 SP1.5
36	91.67	90.07	200	36-8MGT-TB-S	79.35	92	98.5	1.5	B106 SP1.5
37	94.22	92.62	200	37-8MGT-TB-S	83	93	97	1.5	B23 SP1.5
38	96.77	95.17	200	38-8MGT-TB-S	86	97	103	1.5	B24 SP1.5
39	99.31	97.71	200	39-8MGT-TB-S	90	101	106	1.5	B25 SP1.5
40	101.86	100.26	200	40-8MGT-TB-S	90	101	106	1.5	B25 SP1.5

May not have stub shaft
 Material: Steel

Material: Steel


Flanges for timing pulleys
