


MDM N-Series Product Guide

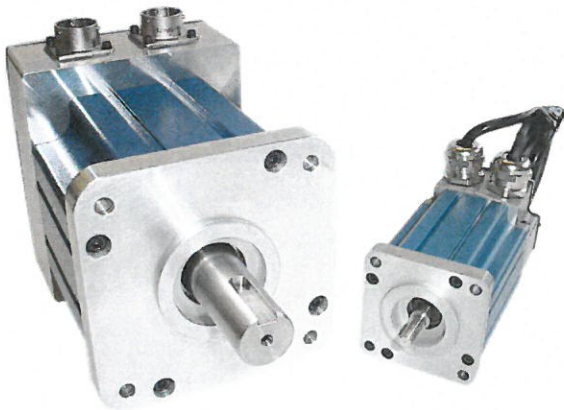

Flexible, simple,
economical drop
in replacement for
Rockwell N-Series

MDM N-Series Product Guide

The MDM N-Series is based on Torque Systems industry leading MDM technology, which provides energy efficient motor configurations in NEMA 23, 34, 42 and 56 standard frame sizes.

These motor configurations are ideal for use in Semiconductor, Robotics, and Material Handling, as well as Web Processing, Printing and Packaging industry applications.

MTI-Torque Systems engineers designed the MDM N-Series to effectively replace Rockwell's discontinued N-Series motor.

FEATURES:	BENEFITS:
Identical front flange and shaft for all MDM N-series offerings	Identical front flanges and shafts is convenient for easy replacement installation
Identical electrical connectors for all MDM N-Series offerings	Eliminating "change-out" headaches
Full IP 65 compliance without shaft seals (optional shaft seals are available)	Maintains internal integrity in a wet environment
Complete conformance to UL/CUL and CE standards across the entire product line	Required industry defined standards conformance in North America
Higher torque densities as compared to original N-series product offerings	Same or better overall performance in a smaller package size
Motor-brake feature standard across the entire product line	Flexible option convenience for most replacement requirements
Brake current within maximum available system current for all configurations	Customers need not modify their designs in anyway to manage brake current issues. Easy Integration!
Optional encoder line counts up to 5,000 available for all configurations	Performance enhancement and feature convenience that allows Torque Systems motors to be considered and incorporated into a broader range of applications

DISTRIBUTED BY

DAVALL
STOCK GEARS

DAVALL STOCK GEARS

Welham Green, Hatfield
Hertfordshire, England, AL9 7JB

Telephone:

Sales Desk +44 (0) 1707 283131
Switchboard +44 (0) 1707 283100
Fax +44 (0) 1707 283132
Email dsg@davall.co.uk


Montevideo Technology, Inc. (MTI)
A Motor And Control Company
TORQUE SYSTEMS

MDM N-Series Product Guide

MDM N-Series-Series Technical Data

	Model #	Outline Drawing No	Continuous Stall Torque (1)		Peak Torque (1)		Ke Back emf (2,3)	Torque constant Kt Sine (2,4)		Resistance L-L (2)	Inductance L-L (2)	Inertia (6)		Motor Length (7)	
			lb-in	Nm	lb-in	Nm	Vpeak/Krpm	lb-in/Apeak	Nm/Apeak	OHM	mH	lb-in-sec ²	Kg cm ²	Inch	mm
Rockwell N Series	N-2302-1-F00AA	N/A	1.7	0.2	4.7	0.53	10	0.73	0.082	3.18	4.1	0.000083	0.0938	4.63	118
CMC MDM N-Series	T0601T0104 (5)	33030-004	4.4	0.5	22	2.5	10	0.73	0.082	1.35	1.7	0.00014	0.15593	4.4	112
Rockwell N Series	N2304-1-F00AA	N/A	4.4	0.5	13	1.4	22	1.6	0.18	4.85	8.1	0.000166	0.1875	6.13	156
CMC MDM N-Series	T0601B8100 (5)	33030-004	4.4	0.5	22	2.5	22	1.6	0.18	6.7	8.2	0.00014	0.15593	4.4	112
Rockwell N Series	N-3406-2-H00AA	N/A	6.8	0.77	18.5	2.1	21	1.5	0.17	2.199	6.1	0.0007	0.7969	5.67	144
CMC MDM N-Series	T0851A0109	31030-078	17.7	2	56.6	6.4	20	1.46	0.165	0.36	1.9	0.0021	2.37288	5.8	147
Rockwell N Series	N-3412-2-H00AA	N/A	13.8	1.56	36	4.1	41	3	0.34	2.699	8.601	0.0013	1.4688	6.67	169
CMC MDM N-Series	T0851C0103	31030-078	17.7	2	56.6	6.4	40	2.93	0.33	1.45	7.6	0.0021	2.37288	5.8	147
Rockwell N Series	N-4214-2-H00AA	N/A	18	2	50	5.7	49	3.6	0.41	2.8	11.0	0.0021	2.375	6.85	174
CMC MDM N-Series	T1101D0102	32030-047	43	4.9	106	12	50	3.66	0.413	1.04	5.0	0.0021	2.37288	6.3	160
Rockwell N Series	N-4220-2 H00AA	N/A	26	2.9	63	7.1	34	2.5	0.28	0.8	2.898	0.003	3.5	7.85	199
CMC MDM N-Series	T1101C6100	32030-047	43	4.9	106	12	34	2.5	0.28	0.44	2.3	0.0021	2.37288	6.3	160
Rockwell N Series	N-5630-2-H00AA	N/A	34	3.8	95	10.7	47	3.5	0.38	0.898	4.3	0.008	9.046	7.83	199
CMC MDM N-Series	T1101D3100	32030-050	43	4.9	106	12	47	3.5	0.38	0.87	4.4	0.0021	2.37288	6.3	160
Rockwell N Series	N-5637-2-H00AA	N/A	46	5.2	120	13.5	60	4.4	0.5	1.0	5.19	0.01	11.2969	8.83	224
CMC MDM N-Series	T1102E0103	32030-052	75	8.5	193	21.9	60	4.4	0.5	0.58	3.6	0.0038	4.29379	7.4	188

- (1) Specification at 40 degrees C ambient with motor mounted on T0601 and T0851 : 254 mm x 254 mm x 6.35 mm; T1101 & T1102: 304.8 mm x 304.8 mm x 12.7 mm aluminum heat sink
- (2) Values @ 25 degrees C ambient
- (3) Peak value of sinusoidal phase to phase voltage
- (4) Peak value of per phase sine wave amps
- (5) Power & feedback connectors are on the flying lead end - not on the motor
- (6) Note inertia differences and validate application suitability
- (7) In general, the Torque Systems MDM N-Series motors are shorter than Rockwell N-series motors. For cases of installation interference consult factory for custom designed motor with power and feedback connectors at the flying lead end.

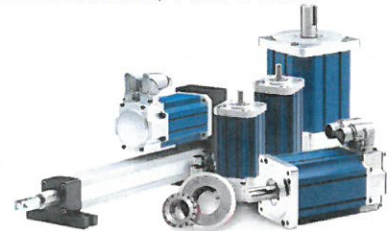

MTI-Torque Systems
 6 Enterprise Road
 Billerica, MA 01821
 Tel: 978.667.5100 or
 1.800.669.5112
 Fax: 978.600.0280
 sales: customer@slmti.com
 www.torquesystems.com

MTI-Torque Systems
 8201 109th St. Suite 500
 Pleasant Prairie, WI 53158
 www.torquesystems.com

DISTRIBUTED BY

DAVALL STOCK GEARS

DAVALL STOCK GEARS
 Welham Green, Hatfield
 Hertfordshire, England, AL9 7JB

Telephone:

Sales Desk +44 (0) 1707 283131
 Switchboard +44 (0) 1707 283100
 Fax +44 (0) 1707 283132
 Email dsg@davall.co.uk

Montevideo Technology, Inc. (MTI)[®]
 A Motor And Control Company
TORQUE SYSTEMS